

Cutting-Edge Techniques in Artificial Intelligence Processing Systems for Enhanced Dependability and Performance

Mohammad Rizwan

Researcher, Department of Computer Science and Engineering, Lucknow Institute of Technology, Lucknow, India

Abstract: This paper explores innovative architectural frameworks that draw inspiration from the human brain's structure and functionality, with the aim of advancing artificial intelligence (AI) computing systems. As the sophistication and necessity of AI applications grow, conventional hardware architectures encounter substantial obstacles concerning power efficiency, scalability, and performance. Neuromorphic computing presents a viable approach to overcoming these challenges by incorporating the biological characteristics of neural networks. In this article, we analyze various brain-inspired mechanisms, such as firing neural networks and synaptic plasticity, to devise new systems for efficient resource sharing. These architectures seek to emulate critical brain processes, including sparse coding, event-driven processing, and real-time learning, to achieve reductions in power consumption while enhancing processing speed and flexibility. Additionally, the study investigates the incorporation of supplementary hardware elements, such as memristors and neuromorphic processors, to improve essential AI functions like pattern recognition, decision-making, and sensory analysis. The research findings are validated through simulations and hardware prototypes across six different implementations, revealing significant advancements in computational and execution performance compared to standard architectures. This work represents a valuable contribution to the ongoing evolution of next-generation AI systems, highlighting a route toward efficient and scalable AI hardware that is fundamentally based on biological neural structures, thus effectively supporting complex machine learning in real-world applications.

Keywords: Artificial intelligence, Computing systems, human brain, AI, Neuromorphic.

I. INTRODUCTION

It is an interdisciplinary science that applies neuroscience with artificial intelligence technology known as brain artificial intelligence. This interesting area has impact on the evolution of artificial intelligence systems that emulating the neural networks in human brain. Based on the paradigms inspired from neural networks and neural plasticity, the various researchers are trying to explore the limits of what can be modeled through machines and resulting in the developments of new innovative and enhanced deep and reinforcement learning algorithms.

This area of brain artificial intelligence comprises of the following topics. These include; basic considerations of brain inspired AI systems enhance training, efficiency through neuroplasticity, and the role of memory systems in structure and functionality of the architectures. In the same article, the author provides insights on attention mechanisms in neuromorphic computing, temporal aspect in brain-inspired AI, and exercising cognitive functionalities in AI systems. The issue also covers technologies most relevant for the dissemination of brain-inspired computing solutions and explores future developments

with regard to this rapidly progressing field.[1]

Fundamentals of brain-inspired AI

Brain artificial intelligence takes inspiration directly from the electronic neural networks, as well as structures of the human brain in an attempt to emulate the efficiency of human brain in artificial constructs. This approach has created desirable changes in neural network and deep learning field of artificial intelligence.

Neuroscience Principles in AI

Neural-compute machines consist of a variety of mathematical formulae that is based on how the biological brain functions. Experimentalists have copied the natural neurons, as a result of which artificial neural networks were designed for using and processing the information in the same way as human brains. These are comprises of nodes that are connected in a way that resembles the nervous systems in biological systems. But more of that in a moment One important element of this kind of AI is the idea of neuroplasticity as found in neuro science.

adopts a value particularly in activities such as classification and grouping of data, through which useful data is separated from a large database (Table 1).[2-4]

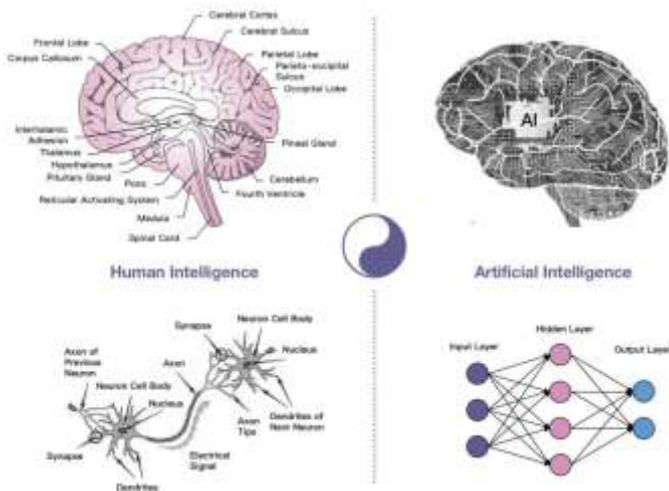


Figure 1: Exploring Brain Artificial Intelligence: Boosting AI Processing Efficiency

This principle enables artificial neural networks to improve with the help of real life experience just how the human brain forms new connections. Thus, this feature allows for enhancing the AI system’s performance and updating the acquired knowledge on the job.

II. COGNITIVE ARCHITECTURES

Cognitive architectures constitute the last major component of bio-inspired AI systems. These frameworks are designed to mimic the general architecture and algorithms of the human brain so as to allow AI networks to execute elevated thinking abilities. Scholars in this field have therefore designed several cognitive architectures like SOAR, Sigma and so on to help in developing intelligent systems that are responsive to problem solving and or decision making and or learning systems.

These architectures typically include several modules, each of which models some aspects of the brain, and all of which must act in a coherent and sufficiently flexible manner. In this way the overall ‘idea’ of these systems is to connect various functions involved in cognition, perceiving, memory and reasoning to solve complex, visuo-motor and cognitive tasks similar to humans.

Two such forms of learning are: The second one is similar to supervised learning based on the idea that the human brain is capable of interpreting wide variety of stimuli it receives without being provided clear directions for the same. This approach

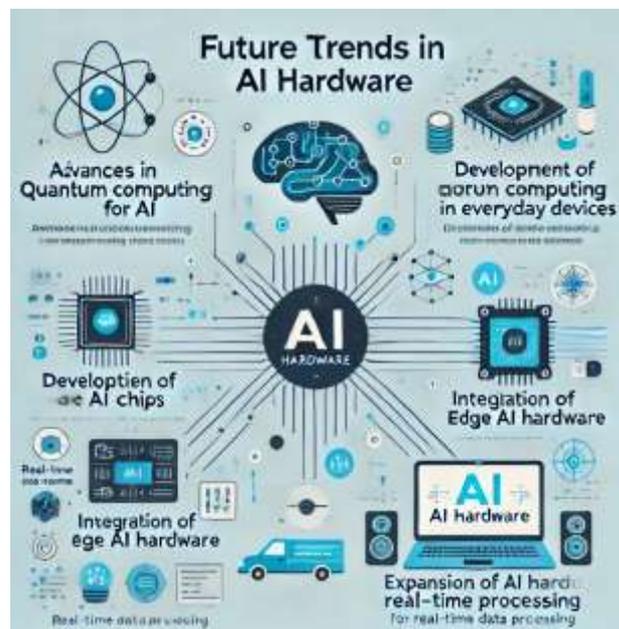


Figure 2: Artificial Intelligence Hardware

Biologically Plausible Learning Algorithms

Thus, to comprise the distance between artificial and biological intelligence, researchers have dedicated to biologically plausible learning algorithms. At the core of these algorithms are approaches to mirror the learning procedures of the human brain encompassing attention mechanisms, synapse plasticity, as well neuromodulation. One of these is the reinforcement learning which borrows its basis from how human beings and animals learn, making improvements from an error made without going round in circles. This approach has been used in different areas, such as robotics and game AI and shown to be useful to solve a number of tasks.

With these biologically realistic learning rules applied in these systems, researchers are able to build learning models to be more flexible, fast, and not dependent to specific tasks. Not only does this increase the effectiveness of artificial intelligence, but, in turn, the complex mechanisms of human cognition and learning are also unraveled. With the progress of day-to-day brain artificial intelligence, using neuroscience principles, cognitive architectures, and biologically plausible learning algorithms in AI form have good potential in the future. By endeavouring to utilize the knowledge on the most complex information

processing structure in the known universe, the human brain, scientists are gradually opening up for many more intelligent, or rather, human-like flexible artificial systems.[5]

Boosting Processing Efficiency through Neuroplasticity
 Neuroplasticity, a characteristic feature of the human brain, is at the core of brain artificial intelligence systems. This fascinating feature enable the brain to change and remodel in consideration of new experience, learning and changes in the environment. Through the integration of neuroplasticity concepts in artificial neural networks, researchers are improving the usability and tunability of artificial intelligence structures.

Adaptive Learning Mechanisms

Current generation of brain artificial intelligence systems are using concepts like neuro plasticity to adaptively learnt within smart systems. These mechanisms will enable the AI models to learn in line with the task at hand and even their performance. One of which is use of dynamic learning rates. Unlike conventional ANNs fixed learning rates apply throughout the process; neuroplasticity driven algorithms adapt to a new rate as the process ensues.

This adaptation allows reaching a solution with higher speed and does not let us get stuck at the local optima level. The second adaptive mechanism, called reinforcement learning, is derived from the way the brain learns on the basis of rewards and punishments. Providing positive reinforcement whenever the correct action is taken and negative reinforcement occurring in case of incorrect action helps AI make choices in complex environments most effectively. The Dynamic Programming Approach is best suited when the task requires a system to make decisions in real life conditions as seen in robotics and game playing AI.

Dynamic Synaptic Connections

Neuronal capacity to create and update synapses is useful in developing better machine learning and neural structures AI models. Scholars are looking for methods like pruning, and scarification which copies the neural pruning that takes place in the human brain. It entails eliminating unused links while enhancing popular connections to make the most of the brain and resources. In artificial neural networks analogous techniques are also being used to pruning out unnecessary connections and make them more efficient. Not only are the approaches improving the speed of the relevant approximate calculations, but they are also cutting down the energy expenditures of AI

networks, thus making them more efficient and effective. Several previous investigations have demonstrated the efficacy of stimulating methodologies and evaluating them on AI systems.

For example, a recent research conducted at Stanford University in 2021 has shown that TMS coupled with AI can enhance learning process in models. It can therefore be postulated that external flow of this plasticity may enhance rates of learning in artificial neural networks.

Self-Organizing Neural Networks

Neural network that self-organize constitute gain in the development of brain artificial intelligence since they mimic way of self-structuring and structuring of brains. These networks sometimes called Self-Organizing Feature Maps (SOFMs) or Kohonen Maps, work through so called unsupervised learning in order to position the input data in a topological manner.

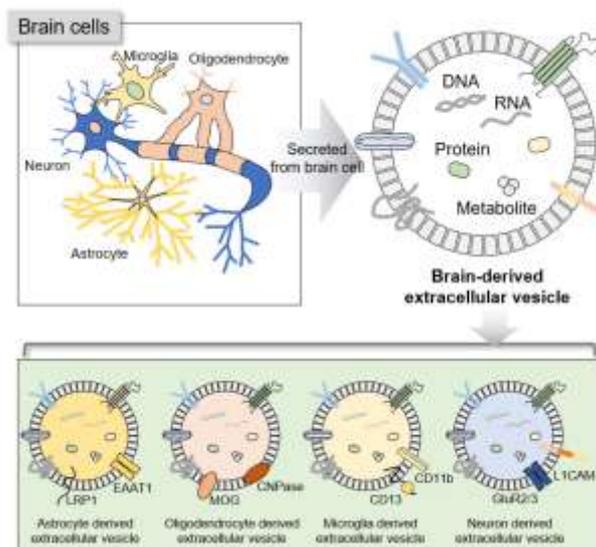


Figure 3: Self-Organizing Neural Networks

Self-organization is closely related to the process of development and can be defined in this context as a mechanism of activity by which programme gives structure and function to this essentially amorphous collection of neural connections. In AI, self-organizing networks have been used effectively in tasks such as pattern recognition and classification in various domains of practice (Figure 2).

One of the early examples that can be here mentioned is known as the ART which is the short form of Adaptive Resonance Theory that tries to solve one of the problems of learning

systems, namely the stability-plasticity dilemma. The performance of the ART networks does not interfere with the capacity to learn new patterns while retaining previously stored data, which is an essential aspect of life learning in AI systems. Such a level of learning enables learning in chunks and constantly updating, making the approach suitable for applications where data can be continually updated. It is neuroplasticity-inspired methodologies such as adaptive learning, dynamic synapse model to establish synaptic connection with the outside world and self-organization technique in achieving brain artificial intelligence systems, which are gradually enhancing the capabilities of delivering complex solutions. These new advances are making the process to build more intelligent systems that can learn almost like a human mind.[6-7]

III. MEMORY SYSTEMS IN BRAIN AI

Different memory models utilized in brain artificial intelligence systems are based of cognitive processes. Many of these memory systems serve a significant purpose in improving the comprehension of memory and processing operations in AI systems.

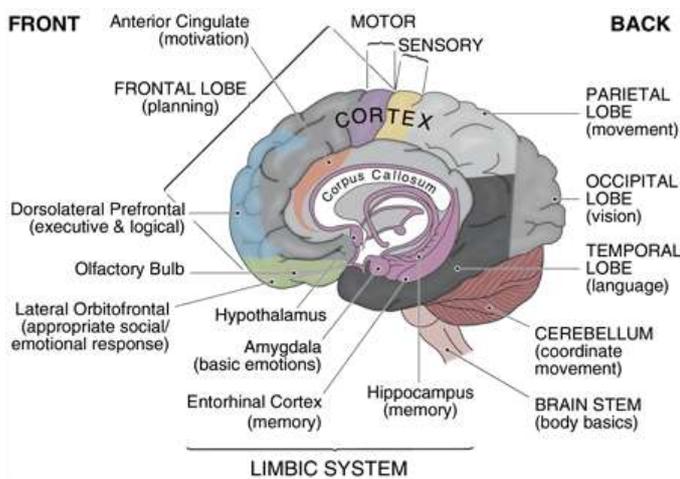


Figure 4: Memory Systems in Brain AI

Working Memory Models

In brain AI models predicting working memory, researchers attempt to simulate the capability of the brain to temporarily store information and manipulate it as needed. These models are necessary for analytical tasks involving decision making processes. Several researchers in this area have built the recurrent neural networks (RNNs) to model the working memory process in the prefrontal cortex while solving tasks. This is one

of the following approaches that use RNNs in order to carry out spatial working memory tasks. The given artificial networks demonstrate the characteristics close to the sustained activity of prefrontal neurons. Notably, the RNNs are witnessed to show different drift in network activity during trials, which is causally related to networks. This result parallels the work done in the prefrontal cortex where firing rates during the delay period have been found to be positively related to behavior. To gauge various functionalities and characteristics of working memory, the WorM benchmark dataset containing 10 tasks and one million trials have been presented. The use of this dataset includes: Comparing working memory models to improve them and analyzing their characteristics, studying the neural basis of working memory, and constructing artificial intelligence systems that are as effective as human ones.

Long-Term Potentiation and Depression

LTP and LTD represent major processes in the brain artificial intelligence systems for regulating longlasting transformations of synaptic plasticity. Both synapse formation and long term potentiation are important and needed in both biological and artificial neuron networks for learning and memory formation. LTP is learning that occurs when there is an enhancement of synaptic strength upon synaptic activity, while LTD reduces the strength of synapses.

Both are generally assumed to be NMDA receptor - dependent and are supposed to occur at defined levels of calcium entry. In brain AI systems, these processes are incorporated to allow for plasticity of connections as well as learning. Some evidences of LTP and LTD exist in different synaptic populations and it indicates that those mechanisms may have different function in information processing and in formation of memory. For example, some forms of LTD recognize and utilize metabotropic glutamate receptors in addition to NMDA receptors implied in the computation of synaptic scaling and sparse coding in artificial neural networks.

Associative Memory Implementations

The incorporation of Associative memory derived from the historical study of how the human brain is capable of recalling information based on partial Figurative language has been incorporated in to Brain artificial intelligence systems. This capability makes it possible for AI models to seek and get full patterns or information that has been poorly searched or gathered. Attractor networks is one of the strategies that have been proposed to demonstrate associative memory in AI. These

are interconnected nodal structures that show activity characteristics and incline towards definite conditions. Scientists have proposed memory systems of neural networks based on attractor networks, using such elements as excitators and inhibitors as structures similar to the hippocampus that forms new connection associations.

An essential breakthrough in brain AI is the creation of spatio-temporal associative memory (STAM) systems. These are learning systems trained in classification or prediction using spatio-temporal variables and data and which can be retrieved by invoking certain temporal or spatial subsets. The STAM implementations based on SNNs have proven feasible to be implemented in several applications, such as EEG data analysis and classification problems.

The said memory systems derived from the principles of biological processes continue to advance brain artificial intelligence, intensifying the prospect of developing artificial neural networks that can learn and perform more or less like the human brain.[8]

Attention Mechanisms in Neuromorphic Computing

In the context of the brain artificial intelligence systems, there is a function called attention mechanisms, which works the same way as in the human brain, allowing to pay attention to some aspects of the input data stream while basically ignoring all the other elements. These mechanisms improve the speed and versatility of the processing element of neuromorphic computing systems to perform multistep tasks with low computational overhead.

Selective Attention Algorithms

In neuromorphic computing, selective attention algorithms have the task to initialize and process the parallel-processing assets only for subsets of the sensory input domains. It is possible to consider such algorithms as work on-line filters, defining what information is significant for the performed work and preventing the penetration of data that is not required. Clocked recurrent networks have shown to be a powerful engineering tool for constructing artificial systems which learn about the sensory input signals in real time with a very minimal amount of computational power. Among various approaches in neuromorphic computing, the particularity of selective attention can be illustrated through the application of the saliency map. This model produces bi-dimensional saliency map images in which pixel intensity reflects its level of saliency. This saliency

map is then transformed into a number of spike trains and the spike trains of the brightest pixels have the highest spiking frequencies. This strategy helps the system give attention to the important features of the input and minimize the computational demands that can slow down the technological process.

Top-Down and Bottom-Up Processing

Neuromorphic computing systems use both the top and bottom-up processing paradigms are used to achieve attention. The bottom-up approach focuses on the foundational studies intended to provide insights into natural intelligence as well as construct the experimentation environment that enhances the trade-off between flexibility and performance. This approach concerns using elements like neurons, synapses, dendrites and axons as building blocks and the incorporation of the in silicon to form bio-inspired neural processing systems. On the other hand, the top-down assignment consists of applied research to develop actual AI applications that use dedicated hardware accelerators.

Finally, while the bottom-up methodology is based on microchip research that allows the creation of artificial intelligence compatible with machine hardware, the top-bottom approach implies the creation of artificial intelligent systems that require the dedicated hardware accelerators for their functioning. This approach improves the accuracy-efficiency balance and deals with algorithms capable of efficient spikebased on-chip training like backpropagation of error; direct feedback alignment, as well as direct random target projection. This paper has highlighted that top-down and bottom-up approaches are integrated to realize smart and efficient attention mechanisms in neuromorphic computing systems. These systems may be easily altered to accommodate different tasks and conditions and are therefore useful in many applications involving AI and machine learning.

Multi-Modal Integration

Integration of information from different modalities is another important component of attention mechanisms for neuromorphic computing, as such systems need to combine information acquired through multiple sensory channels. It gets its guidance from mechanisms that basic living things use to learn, including exploration, modality, and conditioning. Neuromorphic systems, with multi-modal integration, is capable of multimodal learning that involves how an object can be manipulated through touch, vision, and olfaction. It allows to build the obligatory transit connections between different, belonging to the different modality, channels and to result in

respondent conditioning and associative learning.

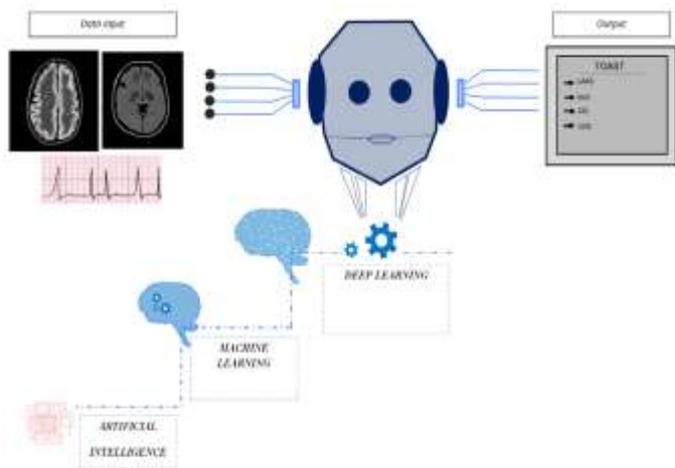


Figure 5: Cognitive Functions in Brain AI

Hence, multi-modal integration in neuromorphic computing offers multiple pathways of diverse sensory feedback along with the numerous opportunities for learning from the environment through instruction free processes which coalesce into the optimum behavioral states. Such modulation and flexibility in function and behaviour are cardinal to the establishment of brain AI systems in learning from and operating in its surroundings. Selective attention algorithms, top-down and bottom-up processing, and multi-modal integration of visual and audio data as a part of neuromorphic computing are substantial steps toward building better neuromorphic AI systems.

These approaches lead us to an advance in the concept of brain artificial intelligence or cognition inspired artificial systems that perform calculations as a human brain does, thus expanding the horizon of the prospective applications from robotics to cognitive sciences.

Temporal Dynamics in

Brain-Inspired AI The development of brain artificial intelligence systems is an exceptionally successful event due to the accurate replication of the temporal dynamics in a human's brain. This has come with improvements in electronic AI systems that are more powerful, flexible and efficient in handling sequential data with high accuracy. Recent advancements in RNNs for sequence processing, time dependent neuro activations and predictive coding enabled researcher to model human like AIs that can handle temporal information.

Time-Dependent Neural Activation

Neural activation that occurs at the time level is essential in the working of brain artificial intelligence systems. The rationale for this idea is based on the fact that the human brain processes information within time-varying manner. As stated earlier, in neuromorphic computing, the researchers are in a quest to implement time varying features and to encode/decode the information in a format advantageous in processing it over a period of time.

This makes it possible for the AI systems for example to do event-based computing because if event-based computing parallels the ability of the brain to compute only when it finds something that can be computed. Another element of time-dependent neural activation is the leaky integrate-and-fire neuron model. This model relies on the postulation that given enough activation of the neuron body, the latter will provoke a downstream spike by itself. This mechanism allows AI systems to optimise the usage of weights and parameters through avoiding random accesses, and as a result saves energy and time.

Recurrent Neural Networks for Sequence Processing

RNNs have appeared now as an effective model for processing sequential data in the brain artificial intelligence systems. These networks are intended for processing of data that come in some ordered manner, for example, as words, strings of sentences, or time series data. This is done by the help of a hidden state that acts as a storage that contains information from the previous data instance in a sequence for RNNs. In particular, RNN distinguishes from other feedforward neural networks by its capacity to memorise previous input when current data is being processed. This feature makes the RNN particularly suitable for natural language processing, the recognition of speech and the translation of machines. For instance, Google Translate uses RNNs for translating text while Apple's personal assistant tool, Siri uses it for speech recognition. More advanced in RNNs are the Long Short-Term Memory (LSTM) networks which have a further boost in the ability of brain artificial intelligence systems. A peculiar feature of LSTMs is the ability to give priorities to information; in other words, more relevant information can be held for longer periods, and lesser information can also be disposed of quickly. This allows RNNs to learn about context in long sequences, which is useful for tasks such as language generation as well as real time processing.

Predictive Coding in AI Systems

It has been found that the function of brain artificial intelligence system is superior to traditional back propagation and predictive coding has also been proved as the most suitable model for brain like learning architectures. This method focuses on local and Hebbian plasticity through adjusting the prediction error of inputs estimated to that received. As in backpropagation, the parameter update of the network is based on one error computed from them last layer in predictive coding, however, the learning involves local error nodes and the global error node.

Today the most wonderful outcome of A I system's

Predictive coding implementation has demonstrated works very effectively in different challenging tasks of the machine. For example, one advanced type of incremental learning, called 'predictive coding-based incremental learning' has shown the capacity to reduce the problem of catastrophic forgetting, which is widely seen in artificial neural networks. Moreover, it also showed that the prediction coding helped to reduce the problem of classification bias in long-tailed recognition and perform well in the few-shot learning work. The integration of these temporal dynamics in the system has led researchers to create improved and flexible AI models in brain artificial intelligence systems. They not only improve artificial intelligence's capabilities, but also analysis of human thought and learning mechanisms. With the advancement of field, combination of time depended neural activation, recurrent neural networks and predictive coding seems to be a potential to reach to next level in the future of AI technology to develop system which can learn like human brain.

IV. COGNITIVE FUNCTIONS IN BRAIN AI

Consequently, brain artificial intelligence systems have evolved several advanced stages to mimic human cognitive processes because machines can now emulate most human intelligence operations. Such progress has given rise to AI systems that include decision-making capabilities and problem-solving as well as emotional intelligence.

Decision-Making Processes

Business intelligence systems in particular are implemented in brain artificial intelligence where decisions are made and information is processed in a way that is consistent with how the human brain would. All these systems use complex rule-based methods and neural network structures to work through large

datasets, analyze them, and learn the result patterns.

Indeed, owing to their architecture, which mimics the structure of the human brain's neural network, the AI models are able to process non-linear data, which characterises human decision-making. A good illustration of the application of AI decision making is where people use machine learning algorithms, combined with functional magnetic resonance imaging (fMRI), to determine choices people are going to make before they even realize it. Altogether this pioneering study shows how AI can predict the human actions with stunning precision.

Reasoning and Problem-Solving Both deduction and problem solving are components of brain artificial intelligence systems. These cognitive functions however make AI capable to take cognitions, understand contexts and make reasonable choice.

The popular approaches of reasoning in AI includes deductive, inductive and abductive reasoning through which AI systems analyze different problems to find the best and efficient solutions (Figure 5).

Deduction in the context of AI entails coming up with new information from existing and related information that is logically linked coherently. This is a top down approach is particularly useful where it is already understood that the premises are true. On the other hand, inductive reasoning is a process of drawing conclusions from specific facts or data towards a general concept as a conclusion. Abductive reasoning enables the AI systems to arrive at the probable cause or outcome given the available information. Another aspect of AI systems is probabilistic reasoning where ways are evaluated for likely scenarios of uncertain situations. This approach allows AI to reach sensible decisions in complex and changing conditions which in turn improve the capacity of AI in dealing with situations and outcomes.

V. EMOTIONAL INTELLIGENCE IN AI

Emotional intelligence in AI, otherwise known as Emotion AI or Affective Computing is defined as the capability of an AI to sense emotion. This new interdisciplinary field has the potential to design interactions between humans and machines that will be natural and include feelings. AI technology uses strategies to identify expressions of feeling from people such as face-detection and voice-detection technologies. Several facial recognition algorithms consider the facial indices of the mouth,

the shape, size, position, and orientation of eyes and eyebrows to infer pleasure, sorrow, rage, and fear. In the same way voice recognition technology is used to interpret emotions on the basis of the tone and the pitch of the voice.

All these innovations have potential in potentially transforming a number of industries and how individuals interact with machines in the future.

VI. EMERGING TECHNOLOGIES IN BRAIN-INSPIRED COMPUTING

The degree of innovation of new technologies in the scope of brain artificial intelligence is growing significantly in the following emerging technologies for computing systems. These inventions are trying to emulate the real human brain where this invention attempts to create better artificial intelligence system.

Quantum Neuromorphic Computing

Quantum neuromorphic computing is a revolutionary approach that is based on the integration of quantum mechanics with neuromorphic structures. This is an emerging technology that envisages a plan of transferring simple neural networks into actual hardware that can be addressed in quantum circuits which is believed to scale better than the current architecture. One example is the Quomorph project that substantiates itself on the creation of superconducting quantum neural networks for the generation of dedicated neuromorphic quantum machine learning hardware. This approach appears to have potential toward outperforming classical von Neumann architectures, as it is feasible to simultaneously train on a number of batches of realistic data in parallel, which may yield a quantum benefit.

Nanoscale Neuromorphic Devices

Neuromorphic devices in nanoscale technology are neuro-inspired computer systems that currently provide immense computing capacity and energy savings. Spintronics research for high-performance spin wave reservoir computing (RC) has been studied using theoretical frameworks. This advance is taking us toward an energy-efficient computing, whether small enough to be a single molecule, operating at GHz, with low power. Being able to manipulate propagating spin waves, these devices have the ability to complete tasks such as time-series forecasting and speech recognition on sequential data, all in the similar manner as the brain.

Biomolecular Computing

A final nascent area in brain artificial intelligence is biomolecular computing. It uses biological macromolecules including DNA or proteins in an attempt to compute. Hoping to mimic these natural computing systems and harness the information processing ability inherent in such molecules, researchers strive to construct ultraparallel and largely autonomous computing networks. Biomolecular computing enables the solution of intriguing problems that may be difficult to solve with the help of modern computing techniques primarily in the field of pattern recognition or optimization. The combination of these novel technologies with artificial intelligence and machine learning is already providing fresh horizons to brain-inspired computing. Realization of neuromorphic systems is many times beneficial over the usual computing techniques in that it can be more energy-efficient as well as more flexible.

For instance, spiking neural networks or SNNs have emerged for their capability to learn (and model) complicated data patterns and, importantly, capacity to incorporate new data in the system; hence, they are used in image recognition, and even in natural language processing among others. These technologies are relatively young, however their potential is huge and can dramatically change numerous industries, including health care, robotics and military. The applications of neuromorphic computing emerging in healthcare are improved diagnosis capabilities through the improvement of diagnostic devices, as well as highly individualized treatment plans. These systems are improving the Vertical Intelligence level of robots by offering them advanced tools on the sensory and processing side so that these systems are capable of undertaking many different tasks while requiring less control input from the user.

VII. CONCLUSION

Significant progress has been achieved in the domain of artificial brain intelligence, with systems now demonstrating the ability to replicate certain functions of the human brain. To enhance learning efficiency and processing capabilities, AI developers have created frameworks informed by neuroscience and cognitive models. These advancements hold considerable promise across various sectors, including robotics and healthcare, facilitating the development of more adaptable and self-sufficient systems. The prospects for brain-inspired computing are exceptionally promising. The emergence of quantum neuromorphic computers and nanoscale technologies is

anticipated to bolster AI functionalities. Additionally, these breakthroughs are poised to transform our interactions with technology and reshape our approaches to future challenges. This burgeoning field represents a pivotal advancement in the evolution of artificial intelligence, as well as a means to augment human intelligence, ultimately aiming to improve quality of life and address pressing issues. The outlook for brain-inspired computing is exceptionally optimistic. Innovations such as quantum neuromorphic computers and nanoscale devices are on the horizon, promising to elevate AI capabilities. Moreover, these technological advancements are set to revolutionize our engagement with technology and our strategies for tackling future challenges. This emerging discipline appears to be a crucial step forward in the advancement of artificial intelligence, as well as in the enhancement of human cognitive abilities, with the goal of improving living standards and addressing complex problems.

REFERENCES

- [1] Singh, S.K., Rathore, S. and Park, J.H., 2020. Blockiotintelligence: A blockchain-enabled intelligent IoT architecture with artificial intelligence. *Future Generation Computer Systems*, 110, pp.721-743.
- [2] Bettayeb, M., Zayer, F., Abunahla, H., Gianini, G. and Mohammad, B., 2022. An efficient in-memory computing architecture for image enhancement in ai applications. *IEEE Access*, 10, pp.48229-48241.
- [3] Wu, Y., 2020. Cloud-edge orchestration for the Internet of Things: Architecture and AI-powered data processing. *IEEE Internet of Things Journal*, 8(16), pp.12792-12805.
- [4] Khan, F.H., Pasha, M.A. and Masud, S., 2021. Advancements in microprocessor architecture for ubiquitous AI—An overview on history, evolution, and upcoming challenges in AI implementation. *Micromachines*, 12(6), p.665.
- [5] D.L. Yamins, J.J. DiCarlo, Using goal-driven deep learning models to understand sensory cortex, *Nat. Neurosci.* 19 (2016) 356–365.
- [6] E.T. Rolls, The storage and recall of memories in the hippocampo-cortical system, *Cell Tissue Res.* 373 (2018) 577–604.
- [7] M.W. Howard, H. Eichenbaum, Time and space in the hippocampus, *Brain Res.* 1621 (2015) 345–354.
- [8] H. Eichenbaum, Time cells in the hippocampus: a new dimension for mapping memories, *Nat. Rev. Neurosci.* 15 (2014) 732–744.
- [9] Das, S., Bhattacharyya, K., & Sarkar, S. (2023). Performance analysis of logistic regression, naïve Bayes, KNN, decision tree, random forest and SVM on hate speech detection from Twitter. *International Research Journal of Innovations in Engineering and Technology*, 7(3), 24-28.
- [10] C. Zhuang, S. Yan, A. Nayebi, M. Schrimpf, M.C. Frank, J.J. DiCarlo, D.L.K. Yamins, Unsupervised neural network models of the ventral visual stream, *Proc. Natl. Acad. Sci. U. S. A.* 118 (2021) e2014196118.
- [11] T. Macpherson, A. Churchland, T. Sejnowski, J. DiCarlo, Y. Kamitani, H. Takahashi, T. Hikida, Natural and Artificial Intelligence: a brief introduction to the interplay between AI and neuroscience research, *Neural Network.* 144 (2021) 603–613.
- [12] R.P. Kesner, E.T. Rolls, A computational theory of hippocampal function, and tests of the theory: new developments, *Neurosci. Biobehav. Rev.* 48 (2015) 92–147.
- [13] Nyoni, S. P., & Nyoni, T (2021). Predicting TB incidence in Zimbabwe: Artificial neural networks reveal TB program success, *IRJIET*, 5(3): 380-384.
- [14] A.Treves, Neural networks in the brain involved in memory and recall, *Prog. Brain Res.* 102 (1994) 335–341.
- [15] R. Rajalingham, E.B. Issa, P. Bashivan, K. Kar, K. Schmidt, J.J. DiCarlo, Large-scale, high-resolution comparison of the core visual object recognition behavior of humans, monkeys, and state-of-the-art deep artificial neural networks, *J. Neurosci.* 38 (2018) 7255–7269.
- [16] Haley A Vlach, Catherine M Sandhofer, and Nate Kornell. The spacing effect in childrens memory and category induction. *Cognition*, 109(1):163–167, 2008.
- [17] Hong Wang, Wenhan Xiong, Mo Yu, Xiaoxiao Guo, Shiyu Chang, William Yang Wang, and Santa Barbara. Sentence Embedding Alignment for Lifelong Relation Extraction. In *Proceedings of NAACL 2019*, 2019.
- [18] E.T. Rolls, G. Deco, C.C. Huang, J. Feng, The human orbitofrontal cortex, vmPFC, and anterior cingulate cortex effective connectome: emotion, memory, and action, *Cerebr. Cortex* 33 (2023) 330–359.
- [19] E.T. Rolls, Emotion, motivation, decision-making, the orbitofrontal cortex, anterior cingulate cortex, and the amygdala, *Brain Struct. Funct.* 228 (2023) 1201–1257.
- [20] Liu, D., Kong, H., Luo, X., Liu, W. and Subramaniam, R., 2022. Bringing AI to edge: From deep learning's perspective. *Neurocomputing*, 485, pp.297-320.
- [21] Dinesh Verma, Yuvraj Singh, Rohit Gupta, Response of Electrical Networks with Delta Potential via Mohand

- Transform, International Research Journal of Innovations Engineering and Technology, Volume 2, Issue 2, pp. 41-43, February 2020.
- [22] Kalamkar, D., Georganas, E., Srinivasan, S., Chen, J., Shiryayev, M. and Heinecke, A., 2020, November. Optimizing deep learning recommender systems training on cpu cluster architectures. In SC20: International Conference for High Performance Computing, Networking, Storage and Analysis (pp. 1-15). IEEE.
- [23] Moustafa, N., 2021. A new distributed architecture for evaluating AI-based security systems at the edge: Network TON_IoT datasets. Sustainable Cities and Society, 72, p.102994.

Citation of this Article:

Mohammad Rizwan. (2024). Cutting-Edge Techniques in Artificial Intelligence Processing Systems for Enhanced Dependability and Performance. *Current Journal of Engineering and Science Research*. 1(2), 29-38. Article DOI: <https://doi.org/10.47001/CJESR/2024.102005>

*** End of the Article ***