

User Experience (UX) in the context of Web3 and DApps: Issues and Potential

¹Selvakumar A, ²Dr. Anbalagan C

¹Student, Rathinam Institute of Technology, Pollachi Main Road, Coimbatore-641021, India

²Professor, Rathinam Institute of Technology, Pollachi Main Road, Coimbatore-641021, India

Abstract: The Web3 technologies promise decentralization, ownership, and privacy by design; however, they also introduce significant challenges in usability and accessibility. Despite the rapid proliferation of decentralized applications (DApps), mainstream adoption remains limited—primarily due to poor user experience (UX). This paper investigates the key UX challenges in the Web3 ecosystem, including complex onboarding, lack of standardized design patterns, and opaque transaction processes. Furthermore, it highlights emerging solutions and innovations aimed at improving UX. Through analysis of real-world DApps and supporting tools, this study offers insights and actionable directions for designing more intuitive and user-centric decentralized applications. Nonetheless, this decentralized framework presents various user experience (UX) challenges, such as intricate wallet configuration, key management, and understanding transactions. In contrast to conventional applications, decentralized applications (DApps) frequently necessitate users to maneuver through unfamiliar interfaces and concepts, potentially obstructing widespread adoption. This study examines the primary UX obstacles and possible opportunities within Web3, emphasizing the enhancement of user engagement and adoption via user-centered design, usability improvements, and accessible onboarding procedures.

Keywords: Web3 UX, Decentralized Applications (Dapps), Blockchain Usability, User Onboarding, Web3 Design Systems, Social Login in Web3, Security and Trust in DApps.

I. INTRODUCTION

The evolution of the Internet from Web1 to Web3 marks a significant shift from static content delivery to interactive, user-owned ecosystems. Web3, powered by blockchain technology, represents a decentralized framework where data is stored across a distributed network in an immutable and transparent manner. This foundational technology has enabled the development of decentralized applications (DApps), which operate without intermediaries by leveraging smart contracts and cryptographic identities.

However, this decentralized model introduces a range of user experience (UX) challenges, including complex wallet setup, key management, and transaction comprehension. Unlike traditional applications, DApps often require users to navigate unfamiliar interfaces and concepts, which can hinder mainstream adoption.

This paper explores the key UX barriers and potential opportunities in Web3, with a focus on improving user engagement and adoption through user-centric design, usability enhancements, and accessible onboarding processes.

II. BACKGROUND AND RELATED WORK

Existing literature highlights the increasing demand for improved user experience (UX) within blockchain-based systems. Buterin [Vitalik.ca, 2022] emphasized that poor usability remains a significant barrier to mass adoption. Research from the Ethereum Foundation [Ethereum Foundation, 2022] indicates high user dropoff rates during onboarding, primarily due to the complexity of wallet setup and the absence of effective feedback mechanisms.



To address these issues, A16Z Crypto introduced the concept of “invisible crypto,” where users can engage with decentralized services without direct exposure to the underlying blockchain infrastructure [a16zcrypto.com, 2021]. This approach aims to abstract away technical complexities to enhance accessibility.

Several tools and frameworks have emerged to support this vision. Design libraries such as Web3Modal and Magic.link [Magic.link, 2023] focus on streamlining authentication processes, while platforms like RainbowKit [RainbowKit, 2023] advocate for consistent design systems across decentralized applications (DApps), contributing to a more unified and intuitive user experience.

III. UX CHALLENGES IN WEB3 AND DAPPS

Despite the rapid growth of decentralized applications, several user experience (UX) challenges hinder widespread adoption. Key issues include:

A. Onboarding Complexity

Most DApps require users to connect a cryptocurrency wallet (e.g., MetaMask, Phantom), which can lead to confusion—particularly among beginners. Users must understand how to manage non-custodial wallets, safeguard private keys, and store seed phrases securely. This onboarding flow contrasts sharply with the familiar single sign-on mechanisms common in Web2 applications.

B. Speed, Performance and Feedback

Blockchain transactions are not instantaneous; confirmation times vary across networks. Users often receive limited or no feedback during transaction processing, leading to uncertainty. Inconsistent UI behavior, lack of real-time indicators, and poor error handling contribute to a fragmented and frustrating user experience.

C. Gas Fees and Unexpected Costs

Nearly every action in Web3—such as minting NFTs or swapping tokens—incurs a gas fee. These fees fluctuate based on network conditions and can be prohibitively expensive. New users often lack an understanding of what “gas” entails, and the absence of clear explanations or contextual cues leads to confusion and mistrust.

D. Multi-Chain Complexity

With many DApps supporting multiple blockchains (e.g., Ethereum, Polygon, Solana), users are required to manually switch networks within their wallets. Navigating different token standards and ecosystem behaviors increases cognitive load and introduces friction, especially for newcomers unfamiliar with cross-chain interactions.

E. Security and Trust


Many DApps resemble development tools in appearance and lack the polished design and centralized verification systems found in Web2 services. This unfamiliar aesthetic, coupled with the risk of phishing attacks, malicious smart contracts, and wallet-draining exploits, often leads users to hesitate or abandon interactions altogether.

IV. UX OPPORTUNITIES AND INNOVATIONS

To address the challenges of decentralized application usability, a variety of tools and design approaches are emerging. These innovations aim to bridge the gap between complex blockchain infrastructure and user-friendly experiences:

A. Social Login and Seamless Onboarding

Solutions like Web3Auth and Magic.link enable Web2-style authentication while maintaining the non-custodial nature of Web3 wallets [Magic.link, 2023].

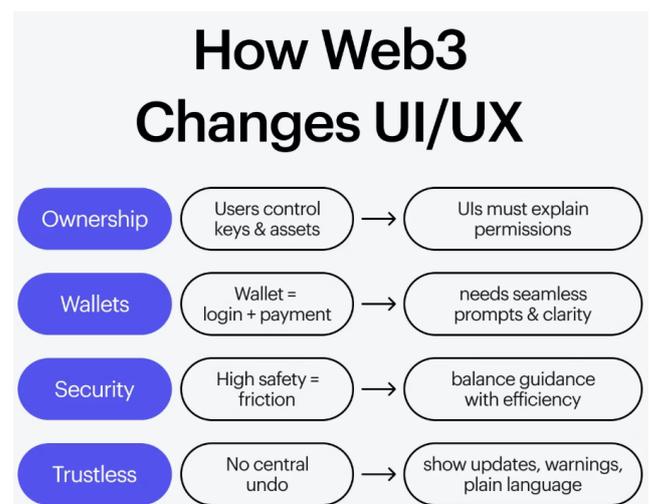

Web3Auth is a decentralized authentication system that allows users to access DApps and blockchain wallets via familiar mechanisms such as social logins, email, or SMS. It preserves

user control over cryptographic keys using Multi-Party Computation (MPC) and Shamir's Secret Sharing to ensure both usability and security.

Magic.link offers password less authentication through email-based links or wallet sign-ins. It eliminates the need for passwords using secure JSON Web Tokens (JWTs) and encrypted keys. The system enhances security by limiting link validity and preventing reuse.

B. Gasless Transactions

Meta-transactions improve accessibility by enabling users to interact with blockchain applications without holding native tokens or paying gas fees [OpenZeppelin Docs, 2022]. Users sign messages off-chain describing desired actions; a relayer service then submits the transaction on-chain and pays the gas. The smart contract verifies the signature, ensuring legitimacy. This model improves onboarding by reducing friction and aligning DApp interactions with familiar Web2 experiences.

C. Cross-Chain and Layer 2 User Experiences

Protocols such as LayerZero facilitate seamless communication across different blockchains, eliminating the need for manual network switching [LayerZero Network, 2023]. Traditional blockchains are siloed; LayerZero acts as a secure messaging layer, enabling smart contracts on various chains (e.g., Ethereum, Avalanche, Arbitrum) to interact directly. This interoperability simplifies multi-chain development and enhances UX by abstracting away the complexities of bridging.

D. UI Frameworks for DApps

Developer tools like RainbowKit and useDApp accelerate the creation of user-friendly interfaces through reusable components and pre-built design patterns [RainbowKit, 2023].

RainbowKit is a React-based library developed by the Rainbow Wallet team that simplifies wallet integration into DApps with customizable, intuitive components compatible across chains. It enables efficient integration of smart contracts and network interactions using familiar development paradigms.

E. Smart Wallets and Abstraction Layers

Smart contract wallets such as Argent and Safe (formerly Gnosis Safe) offer advanced UX features like account recovery and gas abstraction [Safe Global Docs, 2023].

Argent is a mobile-first smart wallet designed for everyday users, offering features like Guardian-based recovery and gas-free transactions to enhance security and ease of use.

Safe is a multi-signature wallet ideal for organizations, enabling secure collaborative asset management through customizable access controls and advanced transaction logic.

V. CASE STUDIES

A. Uniswap: Simplified Token Swapping Interface

Uniswap provides a clean, user-friendly interface for token swaps, effectively abstracting the underlying technical complexities [Uniswap.org, 2023]. Unlike traditional exchanges that rely on order books, Uniswap employs an automated market maker (AMM) model using a constant product formula:

$$x \cdot y = k$$

Where:

x = quantity of Token A

y = quantity of Token B

k = a fixed constant

This formula ensures that the product of token reserves in a liquidity pool remains constant after every trade. Despite the algorithmic complexity, users interact with Uniswap via an intuitive interface, promoting accessibility and ease of use.

B. Zapper: DeFi Portfolio Aggregation and Visualization

Zapper aggregates decentralized finance (DeFi) data into a unified, visual dashboard, allowing users to track, invest in, and optimize their portfolios across multiple chains. Its comprehensive feature set streamlines complex DeFi interactions through a cohesive user interface:

Portfolio Management

- Unified dashboard for asset tracking
- Multi-chain support across DeFi protocols

Asset Optimization

- One-click investment strategies
- Automated transaction handling

Transaction Execution

- Integrated token swap capabilities
- Staking and yield farming support

User Experience

- Intuitive, responsive design
- Emphasis on security and privacy
- Zapper's emphasis on a consistent UX and visual clarity significantly lowers the barrier to entry for retail DeFi users.

C. Lens Protocol: Decentralized Social Networking

Lens Protocol offers a decentralized infrastructure for social media applications, with a focus on user-owned identity and data [Lens.xyz, 2033]. It enhances engagement by integrating social NFTs and modular smart contract architecture. However, its wallet-first onboarding model may deter less technically inclined users.

Key features include:

- Profile NFTs: Represent user identity on-chain
- Follow NFTs: Cryptographic proof of social connections
- Modular Architecture: Enables extension of functionality without altering core contracts
- Polygon Integration: Ensures fast, low-cost transactions

While Lens introduces innovative UX elements such as composability and on-chain identity, simplifying the onboarding flow remains a critical area for improvement.

VI. CONCLUSION

While Web3 holds tremendous potential for enabling decentralized ownership and autonomy, user experience (UX) challenges continue to be a significant barrier to its mainstream adoption. Simplifying the onboarding process, providing consistent feedback, and standardizing design patterns are essential steps to improving usability. Furthermore, the integration of user-centric innovations, such as smart wallets and gas abstraction, can substantially enhance accessibility and usability, thereby promoting broader user engagement in decentralized applications (DApps).

REFERENCES

- [1] Magic.link, "Developer docs – Simplifying authentication in Web3," Magic.link, 2023.
- [2] RainbowKit, "Build a better wallet connection UI," RainbowKit, 2023.
- [3] Safe (Gnosis), "Safe wallet documentation," Safe Global Docs, 2023.
- [4] OpenZeppelin, "Meta-transactions explained," OpenZeppelin Docs, 2022.
- [5] V. Buterin, "The most important thing Web3 is missing," Vitalik.ca, 2022.
- [6] Uniswap Labs, "Uniswap: A decentralized exchange," Uniswap.org, 2023.
- [7] Zapper, "Zapper dashboard: DeFi portfolio management," Zapper.fi, 2023.
- [8] Lens Protocol, "Build Web3 social experiences," Lens.xyz, 2023.
- [9] Ethereum Foundation, "UX research reports," Ethereum Foundation, 2022.
- [10] A16Z Crypto, "Invisible crypto: Making UX seamless," a16zcrypto.com, 2021.
- [11] LayerZero Labs, "Omnichain interoperability," LayerZero Network, 2023.

Citation of this Article:

Selvakumar A, & Dr. Anbalagan C. (2025). User Experience (UX) in the context of Web3 and DApps: Issues and Potential. *Current Journal of Engineering and Science Research*. 2(12), 23-26. Article DOI: <https://doi.org/10.47001/CJESR/2025.212004>

*** End of the Article ***